



Mobil Super™ All-In-One Protection 0W-20

Mobil Passenger Vehicle Lube , Indonesia  
Fully Synthetic Engine Oil

Product Description

Mobil Super™ All-In-One Protection 0W-20 is brought to you by the makers of Mobil 1.

Mobil Super™ All-In-One Protection 0W-20 is formulated with Heat Activated Anti-Wear™ molecules, which provides excellent engine protection and proven to p engine protection for 20 years\* in latest API SP engine test.

Features and Benefits

- Suitable for European, American, Asian petrol engines.
- Heat Activated Anti-Wear™ molecules technology provides high temperature wear protection, while keeping your engine clean.
- Proven engine protection for 20 years.\*
- Save up to 60 liters of fuel per year.\*\*

\* Based on field trial in USA under controlled test conditions with routine oil change. 20 years is based on annual driving distance 9,300 miles. Performance ma depending on the engine design, fuel, temperature and actual driving conditions.

\*\* Based on Sequence VIE test result against API SP industry reference oil. Performance may vary depending on the engine design, temperature and actual i conditions.

Applications

Mobil Super™ All-In-One Protection 0W-20 is recommended for petrol engines, including SUVs, MPVs, and Hybrid cars, where API SP and SAE 0W-20 viscosity g recommended.

Always consult your owner's manual to check recommended viscosity grade and specifications for your particular vehicle.

Specifications and Approvals

This product meets or exceeds the requirements of:
API SJ
API SL
API SM
API SN
API SN PLUS
API SP
ILSAC GF-6A

This product meets or exceeds the requirements of:	
Ford WSS-M2C947-A	
Ford WSS-M2C947-B1	
FORD WSS-M2C962-A1	

Properties and Specifications

Property	
Grade	SAE 0W-20
Flash Point, Cleveland Open Cup, °C, ASTM D92	231
Pour Point, °C, ASTM D97	-39
Viscosity Index, ASTM D2270	175
Total Base Number, mgKOH/g, ASTM D2896	7.5
Density @ 15 C, g/ml, ASTM D4052	0.844
Kinematic Viscosity @ 40 C, mm2/s, ASTM D445	40
Hi-Temp Hi-Shear Viscosity @ 150 C 1x10(6) sec(-1), mPa.s, ASTM D4683	2.7
Mini-Rotary Viscometer, Apparent Viscosity, -40 C, mPa.s, ASTM D4684	29600
Ash, Sulfated, mass%, ASTM D874	0.7
Kinematic Viscosity @ 100 C, mm2/s, ASTM D445	8


Health and safety

Health and Safety recommendations for this product can be found on the Material Safety Data Sheet (MSDS) @ <http://www.msds.exxonmobil.com/psims/psims.as>  
All trademarks used herein are trademarks or registered trademarks of Exxon Mobil Corporation or one of its subsidiaries unless indicated otherwise.

02-2024  
ExxonMobil Asia Pacific Pte Ltd  
Jakarta Representative Office  
Wisma GKBI 27th Floor  
Jl. Jenderal Sudirman No. 28  
Jakarta 10210  
Indonesia

+62 21 574 0707  
<http://www.exxonmobil.com>

Typical Properties are typical of those obtained with normal production tolerance and do not constitute a specification. Variations that do not affect product performance are to be expected during normal manufacture and at different blending locations. The information contained herein is subject to change without notice. All properties may not be available locally. For more information, contact your local ExxonMobil contact or visit [www.exxonmobil.com](http://www.exxonmobil.com)  
ExxonMobil is comprised of numerous affiliates and subsidiaries, many with names that include Esso, Mobil, or ExxonMobil. Nothing in this document is intended to override or supersede the corporate separateness of local entities. Responsibility for local action and accountability remains with the local ExxonMobil-affiliate entity.

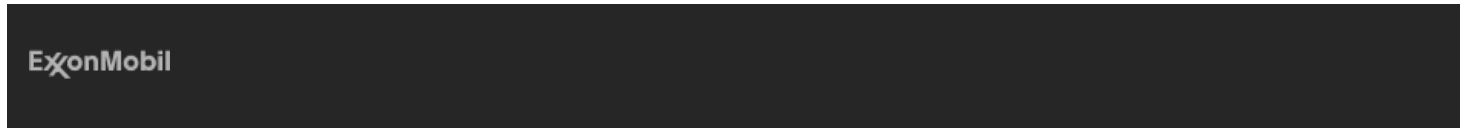

Exxon

Mobil

Esso

XTO

© Copyright 2003-2024 Exxon Mobil Corporation. All Rights Reserved